

## ZINC-PLATED SUBFRAME

for flush in the wall window fixtures suitable for thermal insulation coating

Insulated subframes to install flush in the wall window fixtures (internal) reach excellent mechanical and thermal insulation properties. Moreover, they are suitable for thermal insulation coating.


### SUBFRAME

- ◇ zinc-plated metal sheet angle, pressed, welded to the roller shutter track, with internal PLYWOOD insulation
- ◇ box for hose reel and rope, clasped to the frame with clamps
- ◇ zinc-plated steel templates easy to use to get the right window/door measure

### POSSIBLE MEASURES

- ◇ 45 x 60 x variable STANDARD ANGLE BRACKETS with zinc-plated tracks or with aluminium for thermal insulation coating
- ◇ NOT - STANDARD ANGLE BRACKETS ON DEMAND\* for wood, PVC, aluminium, sliding or with mosquito net windows
- ◇ (\*) Subject to our check and suitable for our prefabricated shutter box

### SUITABLE FOR THERMAL

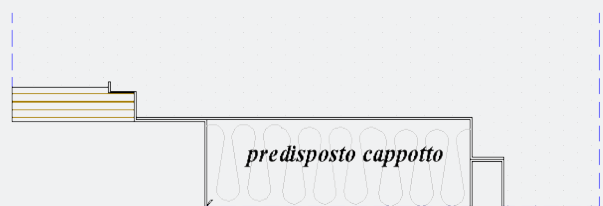

### FINISH FOR PLASTER



### WALL-CENTERED

