

SHUTTERS MONOBLOCK


certifying prefabricated monoblock with thermoacoustic insulation

TECHNICAL DOCUMENT ISSUE*

Certifying prefabricated side is composed of expanded synthesized self-extinguishing polystyrene EPS200 (EN13163), class E of fire reaction, white coloured, with density of 25 kg/m³, 5 cm thick, joint with one Bluclad board (portland cement, minerals enriched, natural fibers, without asbestos, additives) beige colored with hues due to the natural structure of elements of 1 cm thick Bluclad board (external side), joint with one 1.8 cm thick Plywood board (internal wall side).

PREFABRICATED SIDE

for shutters

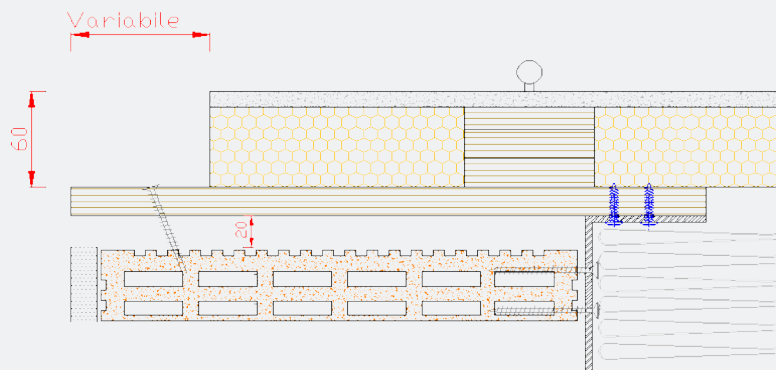

PREFABRICATED SIDE

with threaded tube door hinge for shutters

