


THERMOACOUSTIC 42

transverse sections (measures in millimeters)


36 TA42 THERMOACOUSTIC SHUTTER BOX

(for EXTRA - DELTA - MONDIAL - ALU. NR04 ACC. NR 05 - EXTRUDED ALU. DS 01 - DS 27 roller shutters)

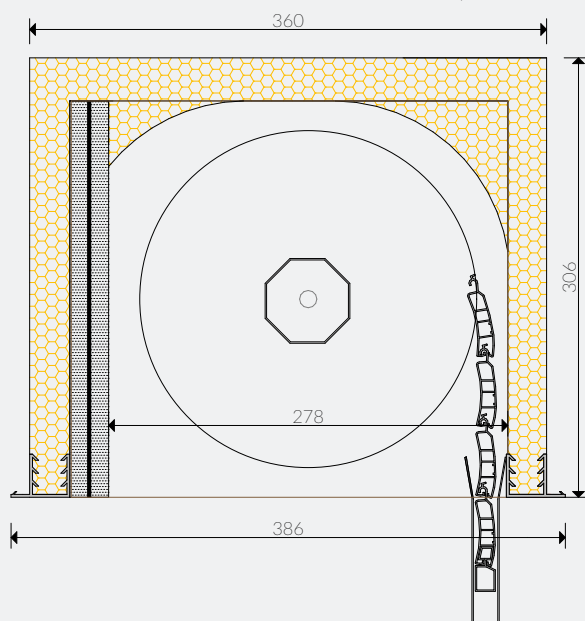

30 TA42 THERMOACOUSTIC SHUTTER BOX

(NR 03 - NR 06 roller shutters)

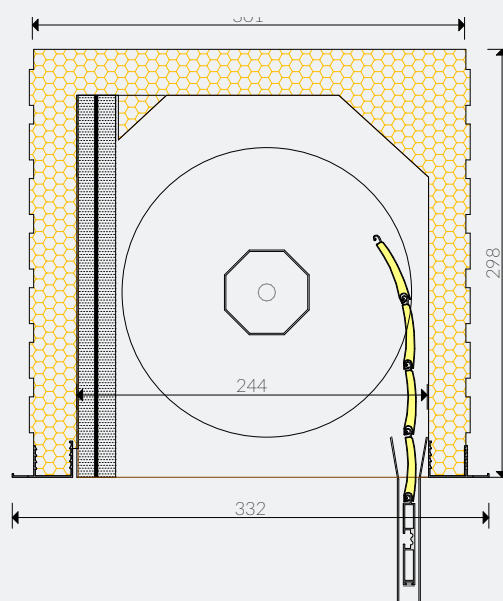


var. TA42 THERMOACOUSTIC SHUTTER BOX

VARIABLE THICKNESS:

270 MINIMUM (for NR 03 - NR 06 roller shutters)

330 MINIMUM (for EXTRA - DELTA - MONDIAL ALU. NR 04 - STEEL NR 05 - EXTRUDED ALU. DS 01 - DS 27 roller shutters)

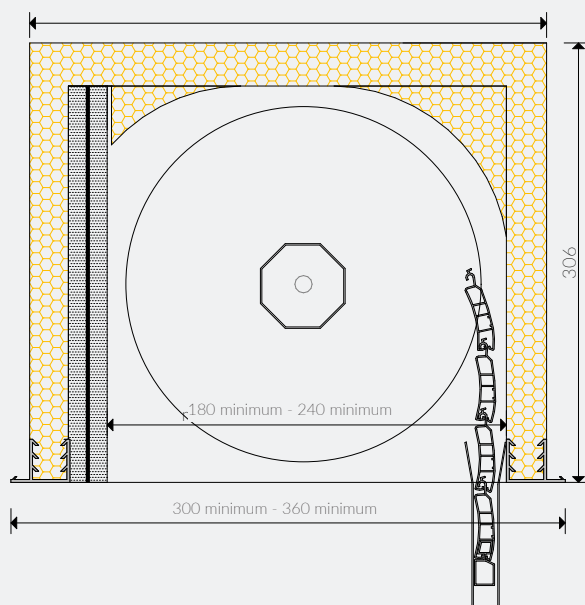

PATENTED